



DEPARTMENT OF ENGINEERING AND PLANNING
Division of Engineering
One Spring Street
Newton, New Jersey 07860
973-579-0430
dpw@sussex.nj.us
Matthew R. Sinke, P.E.
Division Director/Assistant County Engineer

Construction Update – Bridge Q-06 Replacement Distributed: April 29, 2022

ADVANCE TRAFFIC ADVISORY FOR DAILY ROAD CLOSURES / TEST PITTING

Project:

Replacement of Bridge Q-06

Carrying Main Street over the Wallkill River, Sparta Township

Bridge Q-06 will be replaced with a widened structure that incorporates sidewalks in both directions.

Contractor: State Line Construction, Newark, NJ

Closure: Closure to be Implemented by the Sussex County Office of Bridge & Traffic Safety

Advisory:

The contractor will perform test pitting of the 16" Newton Water Transmission Main to determine the exact locations, depths and dimensions of the pipe, as required in the contract documents.

Schedule & Duration:

- Anticipated Duration is 2 days
- Daily closures are scheduled to take place on Thursday 5/5 and Friday 5/6
- Schedule is subject to change based on unforeseen circumstances

Construction Activities:

- Establish Detour, Install Traffic Control Devices, Close Bridge Q-06 / Main Street
- Perform Test Pitting
- Backfill and Restore Asphalt Roadway
- Remove Detour Signage and Traffic Control Devices, Re-Open Bridge Q-06 / Main Street

Traffic Impacts:


The test pitting operation will require a full closure of Main Street at Bridge Q-06, with a signed detour. Pedestrian access will be maintained through use of sidewalk/ pedestrian bridge on east side of Main Street.



Main Street View of Bridge Q-06



East Bridge Elevation Looking West

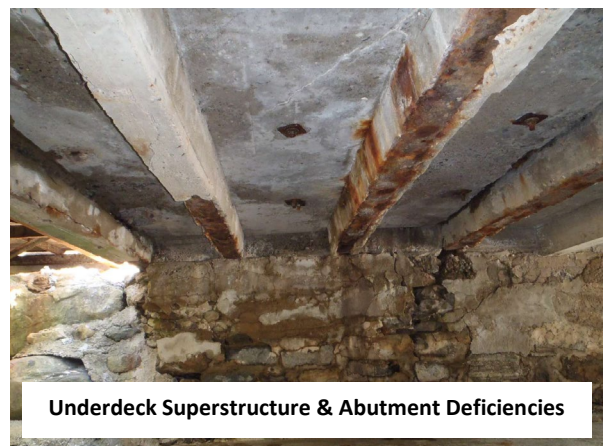

Underdeck Superstructure & Abutment Deficiencies

For more information about this project please feel free to contact Susan Delmar, P.E., at the Sussex County Division of Engineering at 973-579-0430 or dpw@sussex.nj.us



DEPARTMENT OF ENGINEERING AND PLANNING
 Division of Engineering
 One Spring Street
 Newton, New Jersey 07860
 973-579-0430
dpw@sussex.nj.us
 Matthew R. Sinke, P.E.
 Division Director/Assistant County Engineer

Construction Update – Bridge Q-06 Replacement Distributed: April 29, 2022

Detour Map

